



ATS 165

FLOAT LEVEL SWITCH

For automatic regulation with one single device

USE


VR – Emptying / Filling



SIZE


Height: 152 mm – Diameter: 95 mm

DIFFERENTIAL ANGLE

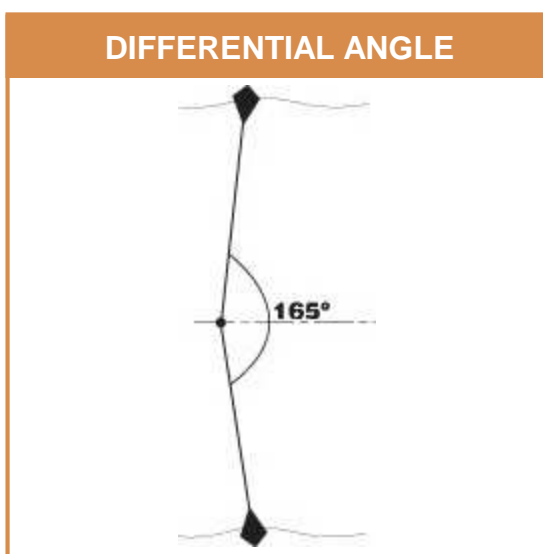

APPLIANCES

WIRING

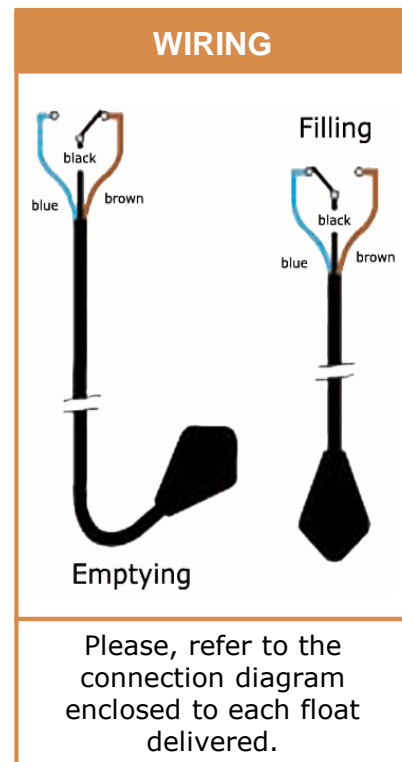

Exceptional float with a 165° working differential angle which totally eliminates jerks on the pumps motors, even in very rough liquids. Moreover, the ATS 165 enables an automatic level regulation of any pump with one single float, replacing two standard regulators. This device is able to perform a regulation with a differential angle of about 1m50 between the high and low levels.

TECHNICAL CHARACTERISTICS

Operation mode	Omnidirectional
Allowed fluid density	0,70 a 1,50
Maximum pressure	3,5 bars
Maximum temperature	85°C
Protection index	IP 68 <input type="checkbox"/>
Electric characteristics	250 VAC- 50/60 Hz
Cut-out power	20 (8) A (20 A resistive - 8 A inductive)
Microswitch	Silver / nickel reverser contacts
Biconical shell	Copolymer polypropylene
Cable	Neoprene or HR HY (hypalon) H07RN8-F
Cable type	3 conductors 1 mm ²
Float weight without cable	325 g
Cable weight	Neoprene 115 g/m – HR HY 110 g/m
Adjustable ballast on cable (option)	Loaded resin 250 g
Standard cable length (series)	5, 10, 15, 20 and 25 m (other lengths on request)



ATMI – Z.A. de l'Observatoire – 2 avenue des Bosquets – 78180 Montigny le Bretonneux – France

Tél: +33 (0)1 61 37 35 60

Fax: +33 (0)1 61 37 35 69

Site Internet: www.atmi.fr

E-Mail: info@atmi.fr

N° 200406986